
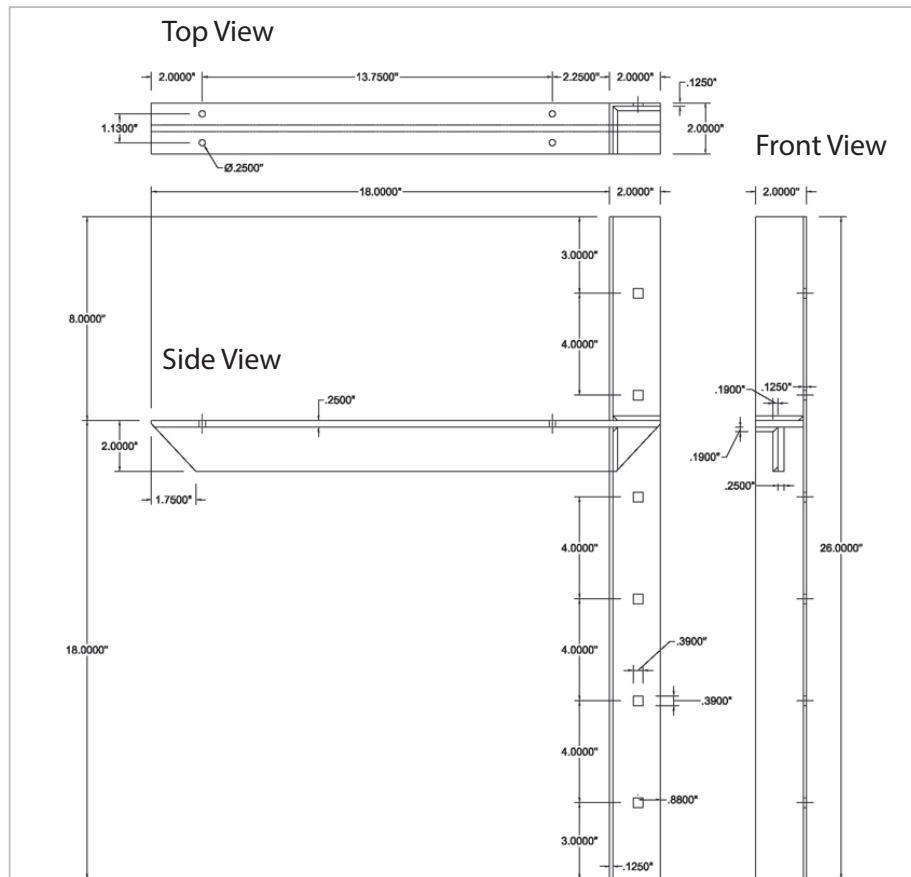


Carrier-Arms

- Carrier Arms are offered for wall-mount installation applications of Counter-Sinks.
- The Counter-Sink may be secured to the carrier arms using products such as 3M VHB tape or a liquid adhesive such as Liquid Nails. Check local codes.
- Carrier arms are designed so that up to 6 bolts can be used with each arm to secure to the stud for maximum reinforcement.
- Carrier arms must be specified on order to ensure a proper fit.
- MTI recommends 2 carrier arms for most single bowl applications.
- 3 might be necessary for Counter-Sinks 60" and up with an offset bowl or 2 bowls.

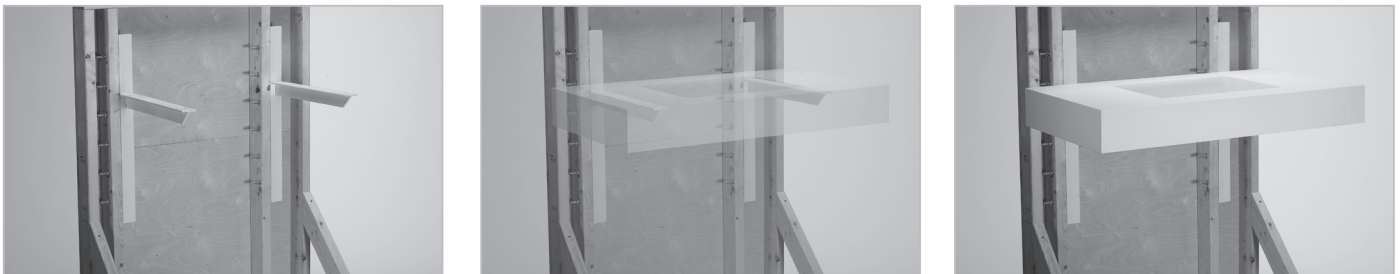

Standard size carrier arm, shown above with a reach of 18", accommodates most Counter-Sinks. A similar model with a 12" reach is available for Counter-Sinks specified under 18" deep. MTI will ship the appropriate size carrier arms when ordered at the time of Counter-Sink purchase.